









Moonlite



#LED3320

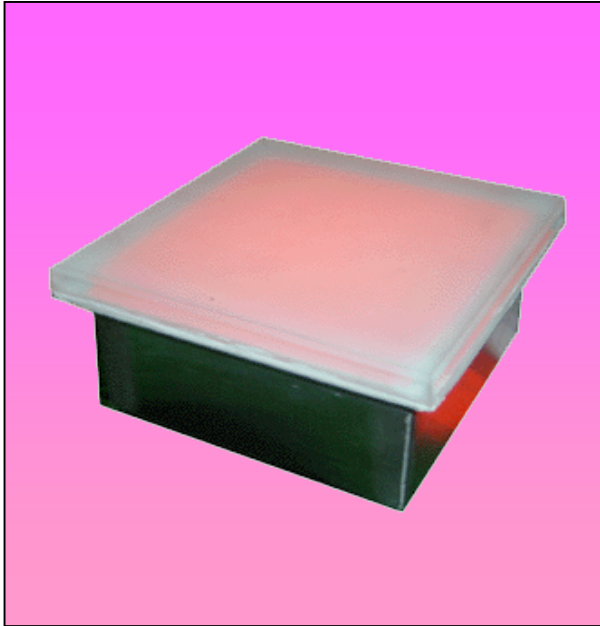

150mm W x 150mm L x 70mm H

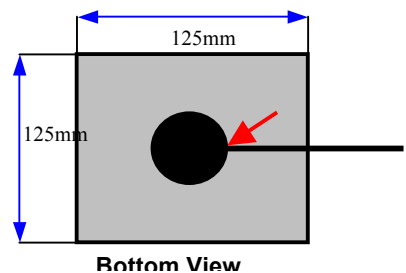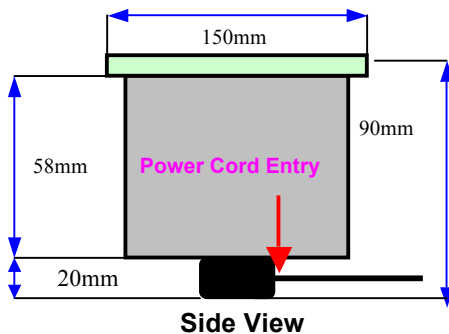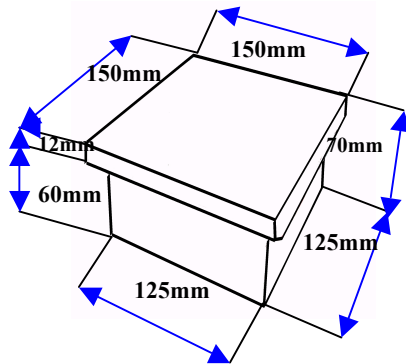

Our colour changing, LED Glass Pavers are fully weather resistant, have automatic colour changing and colour control. Used in buildings, floors, pathways, pergolas, retaining walls, all entertaining area's or as far as your imagination will take you.

GENERAL INFORMATION

Colour Range: Full Colour Spectrum 3.6 Million colours.
LED: 72 LEDs 24, Red, 24 Green, 24 Blue
Glass: 12 mm thickness, Toughened frosted glass.
Wiring: 4-core cable, which enters from the bottom.
(Each brick supplied with 7m of cable)
Casing: Stainless Steel
LED Angle: 120 Degrees Diffused

Features: - Glass brick can withstand approx 800 Kg.
- Lock on to any colour you choose.

TEMPERATURE / IP RATING

Temperature: Approximately -35°C to 75°C
Weather resistant
IP Rating: IP 67 Rating

POWER SUPPLY

Power Supply: 24 Volts DC Output
240 Volts AC 50Hz Input
Power Consumption: 5.2 Watts per paver
Power: 24 Volts per paver
Controller: Programmed for automatic colour changing built into the transformer.
Includes Manual colour lock button

Life of LED Bulb:

Under controlled Australian environmental conditions and normal operating circumstances, according to LED manufacturers specifications our LED glass pavers are expected to last approximately 100,000 hours. Customers can expect a slight depreciation in brightness in the estimated 100,000 hours lifetime.

NOTES

Order Number: #LED3320

Required parts: 7 Watt Transformer
25 Watt Transformer
75 Watt Transformer
150 Watt Transformer

LED Transformer Wattage would depend on quantity of pavers purchased and distance from the power supply. Refer to installation diagram.

2 Bray Ave, Torrensville Adelaide 5031 South Australia

Ph: (08) 8351 8808 Fax: (08) 8351 8830

Email: moonlite@moonlite.com.au Web: www.moonlite.com.au